

# ENQUIRY FORM

## Address

Company / name   
Contact person   
Street   
Postcode / town   
Phone   
Fax   
E-mail   
BV / Commission

## Version

Application  heating  drinking water  cold water  
Material  steel  stainless steel  steel enamelled

## Größe

Content l   
Height cm  Ø without insulation cm   
Tilting dimension cm   
Operating pressure bar  Operating temperature °C   
(max. 95° C buffer storage tank, max. 50° C cold water buffer storage tank)

## Connections

Sleeve number  DN   IG  AG  AG flat sealing  
Flange number  DN  PN   
Sensor number  DN   
Further  ventilation  emptying  revision  
Surface heat exchanger m<sup>2</sup>

## Insulation



Insulation  factory-provided  provided by the customer  without insulation thickness mm   
Version  PU-soft foam  PU-hard foam  diffusion-proof  
 indoor installation  outdoor installation

## Dimensions and connection sketch

if available please send

Desired delivery date

Date  stamp / signature

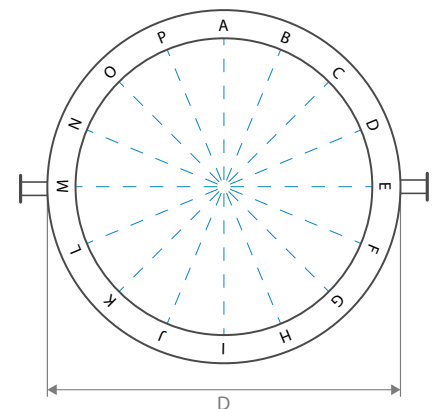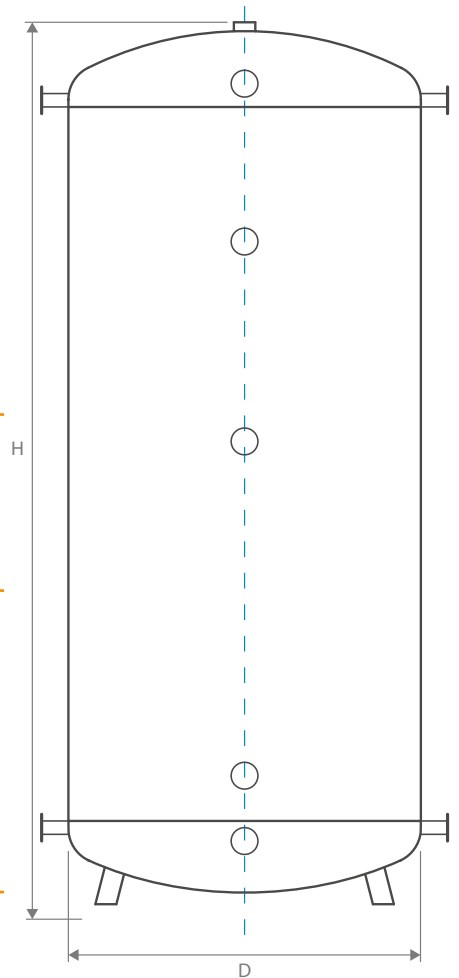

by mail: [info@kraftboxx.de](mailto:info@kraftboxx.de)

**kraftBoxx**  
POWER TO HEAT SYSTEMS

kraftBoxx gmbh  
Riedweg 5, 88326 Aulendorf

Phone: +49 7525 / 924 382  
E-mail: [info@kraftboxx.de](mailto:info@kraftboxx.de)  
Web: [www.kraftboxx.de](http://www.kraftboxx.de)