



D / Massing
 Required cooling capacity 690 kW
 Project year: 2020

PROJECT POULTRY SLAUGHTERHOUSE



Large-cooling network

TASK POSITION

- Sustainable supply of a poultry slaughterhouse with electricity and cooling
- Constant cooling demand should be generated as regeneratively as possible
- Use of waste heat as recovery
- Optimisation of the CO2 balance

SOURCE


Cooling unit



- Cooling unit with 690 kW
- Free-standing PV with 750 kWp
- PV surpluses during the day are stored in the form of refrigeration

Storage tank


heatSel XL - 16 °C

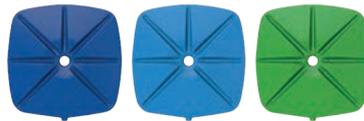

- Latent storage with V = 80,000 litres
- Storage capacity 3,600 kWh
- Water equivalent 360 tsd. litres
- Spread 8 K
- Increase the storage capacity by a factor of 4.5

heatStixx
inside

CONSUMER



- Required cooling capacity approx. 300 kW
- Glycol refrigeration circuit with -16/-8 °C
- PV cooling stored during the day can be called up continuously, with minimal mains power consumption



Increase the storage capacity



CO₂ saving



Peak-Shifting
Peak-Cutting

PARTNER



Modern chicken rearing

Geflügelschlachtereie Gross GmbH is a family business now in third generation. In cooperation with regional farmers, it produces animal welfare-friendly and sustainable poultry meat according to the wishes of its customers.

CONTACT

kraftBoxx
POWER TO HEAT SYSTEMS

kraftBoxx gmbh
Riedweg 5, 88326 Aulendorf

Phone: +49 7525 / 924 382

E-mail: info@kraftBoxx.de

Web: www.heatStixx.de





D / Massing
Required cooling capacity 690 kW
Project year: 2020

Cooling energy application

PROJECT POULTRY SLAUGHTERHOUSE

TASK POSITION



Praxisberichte · Kältetechnik

Fachartikel

Photovoltaik und Latentwärmespeicher
**Nachhaltige Kälteversorgung
in der Großschlachtere**



Large-cooling network



Cooling unit 690 kW



Storage tank 80 tsd. litres with heatSel

Gross GmbH